

1.5A, High Efficiency Buck-Boost Converter

GENERAL DESCRIPTION

The PW2228A is a high efficiency single inductor Buck-Boost converter which can supply the load current up to 1.5A. It provides auto-transition between Buck and Boost Mode. The PW2228A operates at 2.4MHz switching frequency in CCM. DC/DC converter operates at Pulse-Skipping Mode at light load. The output voltage is programmable using an external resistor divider, or is fixed to 3.3V internally. The load is disconnected from the VIN during shutdown.

The PW2228A is available in TDFN3X3-10 package.


FEATURES


- 1.8V ~ 5.5V Input Voltage Operation
- Adjustable Output Voltage from 2.8V to 5.5V
- 95% Efficiency DC/DC Converter
- 1.5A Output Current at 3.3V for VIN > 3.6V
- Auto-Transition Between Buck and Boost Mode
- Pulse-Skipping Mode at light load for Efficiency
- Internal Soft-Start
- DC/DC Converter can be set to lower quiescent current at light load
- Fixed 2.4MHz Frequency and Synchronization Possible
- Built-In Cycle-by Cycle Current Limit and Over Voltage Protection
- Built-In Thermal Shutdown Function
- TDFN3X3-10 Package

APPLICATIONS

- Mobile Handsets
- Smart Phone

TYPICAL APPLICATION CIRCUIT

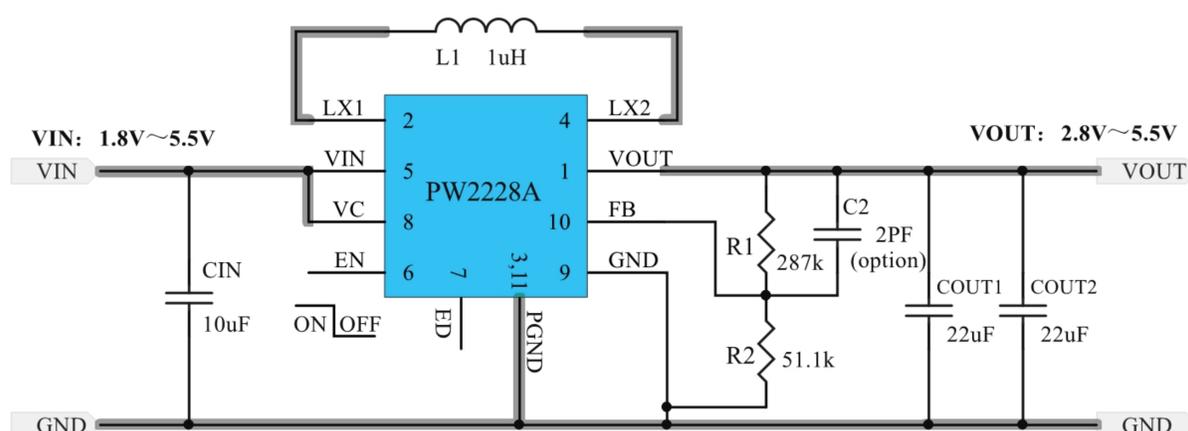

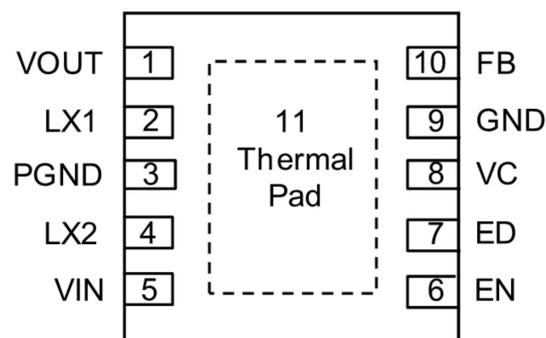
PIN ASSIGNMENT/DESCRIPTION

TDFN3X3-10

Pin	Name	Function
1	VOUT	Power Output of Buck-Boost Converter
2	LX1	Inductor Switch Node
3,11	PGND	Power Ground of Buck-Boost Converter. The exposed pad must be soldered to a large PCB and connected to PGND for maximum power dissipation.
4	LX2	Inductor Switch Node
5	VIN	Power Input of Buck-Boost Converter
6	EN	Enable PIN (1 Enabled, 0 Disabled), must not be left open
7	ED	Enable/Disable Power Save Mode (1 Disabled, 0 Enabled, clock signal for synchronization), must not be left open.
8	VC	IC Power Supply Input
9	GND	Chip Analog Ground
10	FB	Output Voltage Feedback Pin. $V_{OUT} = 0.5V * (1 + R1/51.1K)$

PCB Layout Guide

Careful PCB layout is critical to achieve clean and stable operation. follow these guidelines for good PCB layout:

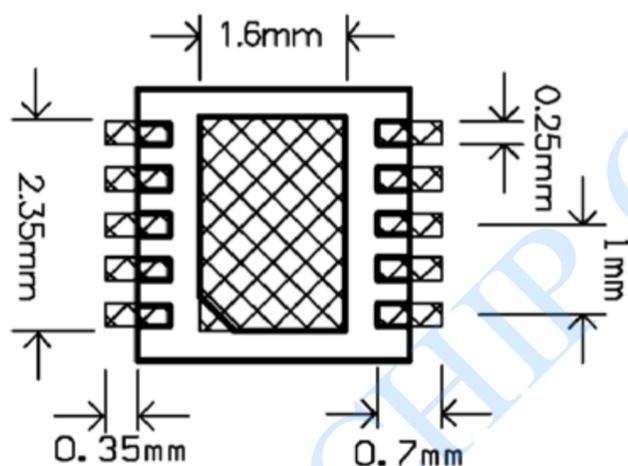1. Place the input and output capacitors as close as possible to the input and output pins.
2. Keep the main power traces as wide and short a possible.
3. Connect the GND and Exposed Pad to a strong ground plane for maximum thermal dissipation and noise protection.
4. Switch node experiences high frequency voltage swings and should be kept in a small area. Keep analog components away from the switch node to prevent stray capacitive noise pick-up.



TDFN3X3-10

Minimum Footprint PCB Layout Section

Absolute Maximum Ratings (note1/2)

● VIN, VC, VOUT	-0.3V to 6.5V
● LX1, LX2	-0.3 to 6.5V
● EN, FB, ED	-0.3 to 6.5V
● Continuous Power Dissipation (TA=25°C)*	TBD
● Operating Ambient Temperature	-33°C to +85°C
● Reflow Temperature (soldering, 10 sec).....	260°C
● ESD (Human Body Made) HMB.....	2KV
● Storage Temperature Range.....	-55°C to 150°C
● ESD (Machine Made)MM.....	200V
● Thermal Resistance Junction to Ambient, (θJA)*	TBD
● Thermal Resistance Junction to Case, (θJC)	TBD

Note:

- (1) Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
- (2) The Device is ESD sensitive. Handling precaution recommended. The Human Body model is a 100Pf capacitor discharged through a 1.5KΩ resistor into each pin.


**ELECTRICAL CHARACTERISTICS**_(note3)

(VIN=VC=3.6V, TA=25°C, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
VIN minimum Startup Voltage	VIN,ST				1.7	V
VIN Operating Voltage	VIN		1.8		5.5	V
Output Voltage Range	VOUT		2.8		5.5	V
Under Voltage Lockout Threshold	VUVLO,R	Vc voltage rising		1.7		V
	VUVLO,F	Vc voltage falling		1.6		V
Quiescent Current	IQ	VEN=VIN=Vc=3.6V, IOUT=0A (PSM)		40	65	μA
Shutdown Current	ISD	VEN=0V, VIN=Vc=3.6V		0.1	1	μA
Oscillator Frequency	FOSC		2.2	2.4	2.6	MHz
Frequency range for Synchronization	FSYN		4.4	4.8	5.2	MHz
Soft-Start Internal	SS	VIN=Vc=3.6V		0.5		ms
Feedback voltage	VFB	Adjustable Output	495	500	505	mV
Line Regulation	ΔVOUT,LINE	PWM		0.5		%
Load Regulation	ΔVOUT,LOAD	PWM		0.5		%
Maximum Duty Cycle	DMAX,D	LX2		100		%
	DMAX,U	LX1	90	93	96	%
FB Leakage Current	IFB,LK	Adjustable Mode			1	μA
VOUT Leakage Current	IVO,LK	VLX1=0V, VOUT=5V		1	5	μA
LX1, LX2 Leakage Current	ILX2,LK , ILX1,LK	VLX2=VLX1=5V		1	5	μA
Switch ON Resistance	RON,P	VIN=Vc=3.6V		150		mΩ
	RON,N	VIN=Vc=3.6V		130		mΩ
Peak Current Limit	ILIM	VIN=Vc=3.6V		2		A
Over Voltage Protection Threshold	%VOVP	Ratio=VOVP/VOUT, VOUT voltage rising		120		%
Short Circuit Protection threshold	%VSCP	Ratio=VSCP/VOUT, VOUT voltage falling		20		%
Thermal Shutdown Protection	TSD			150		°C
Thermal Shutdown Hysteresis	ΔTSD			20		°C
EN, ED Input Voltage	VTH	High Threshold	1.2			V
	VTL	Low Threshold			0.4	V
EN, ED Leakage Current	IEN,LK	EN=Vc or 0V			1	μA
	IED,LK	ED= Vc or 0V			1	μA

Note3: The device is not guaranteed to function outside its operating conditions. Parameters with MIN and/or MAX limits are 100% tested at +25°C, unless otherwise specified.

Block Diagram

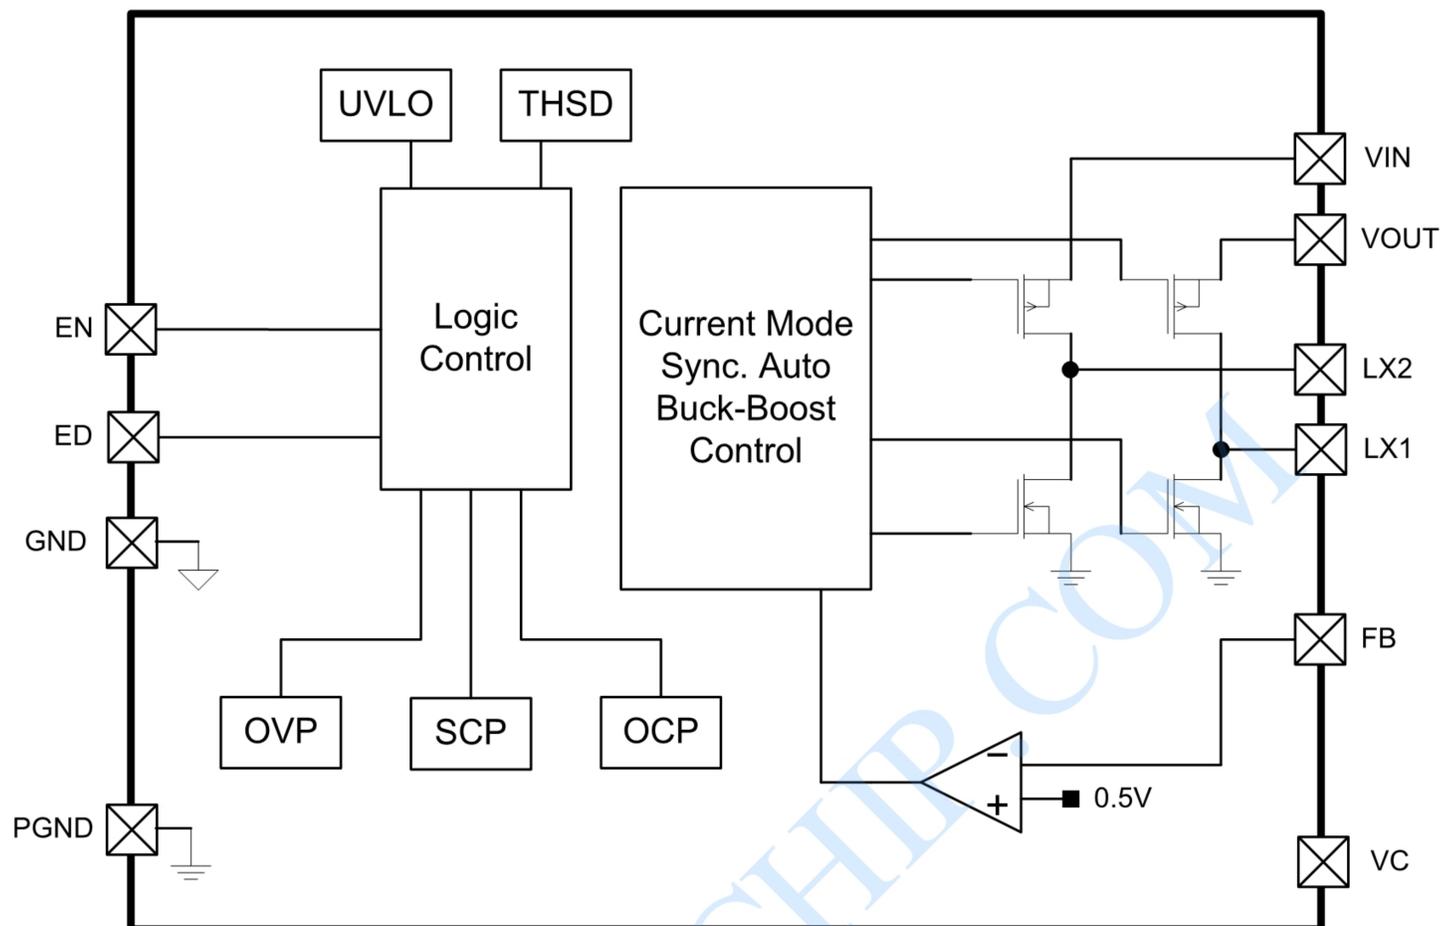

Function Description


Fault Protection

PW2228A provides VIN under-voltage lockout protection, over-current protection, VOUT over-voltage protection, VOUT short-circuit protection, and thermal shutdown protection to achieve complete protection.

	Protection type	Threshold	Protection methods	Reset Method
VIN	UVLO	VIN<1.6V	DCDC shutdown	VIN>1.7V
DCDC Buck-Boost	Current Limit	Peak Inductor current>2A	Buck Mode: PMOS Off, NMOS on Boost Mode: NMOS Off, PMOS on	Automatic Reset at next cycle
	OVP	VOUT>120%*VOUTSET	DCDC stop switching	VOUT1<110%*VOUTSET
	SCP	VOUT<20%*VOUTSET	Current Limit = 1A OSC Frequency=1.2MHz	VOUT>30%*VOUTSET
Thermal	TSD	Junction Temp. >150°C	DCDC shutdown	Junction Temp. <130°C

PACKAGE DESCRIPTION

TDFN3X3-10

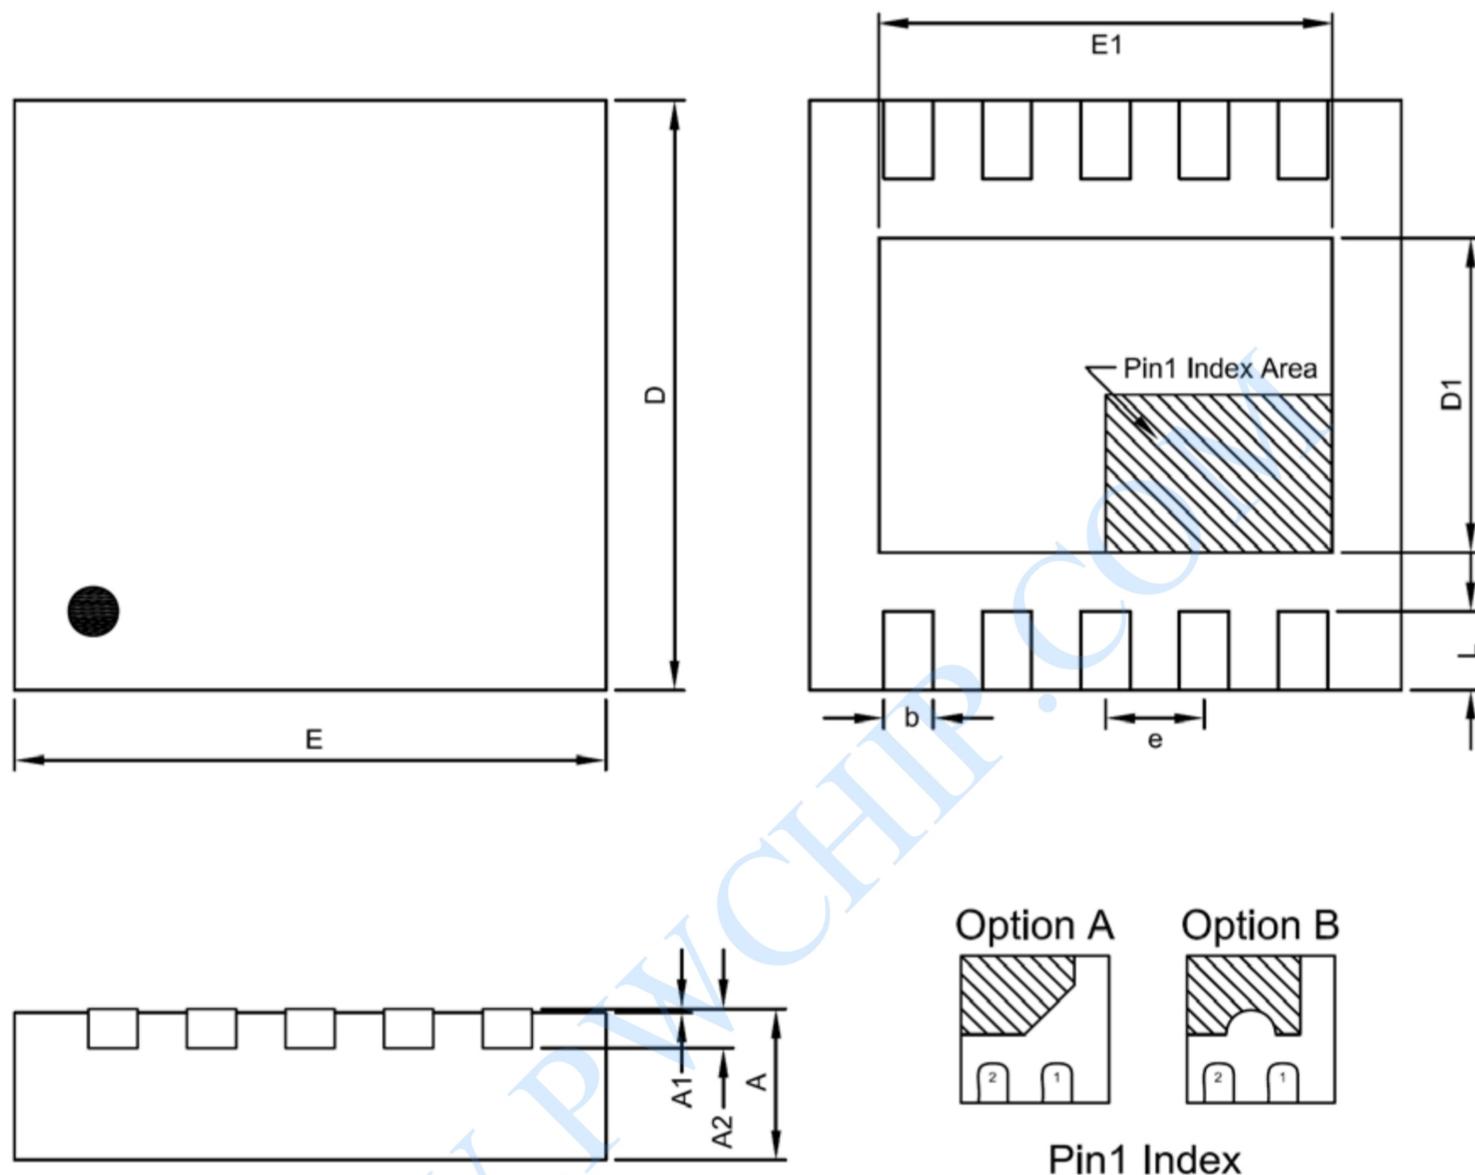

Symbol	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.0276	0.0295	0.0315
A1	0.00	---	0.05	0.0000	---	0.0020
A2	0.20 REF			0.0079 REF		
D	2.95	3.00	3.05	0.1161	0.1181	0.1201
E	2.95	3.00	3.05	0.1161	0.1181	0.1201
D1	1.50	1.60	1.75	0.0591	0.0630	0.0689
E1	2.20	2.60	2.70	0.0866	0.1024	0.1063
b	0.18	0.25	0.30	0.0071	0.0098	0.0118
e	0.50 BSC			0.0197 BSC		
L	0.30	0.40	0.50	0.0118	0.0157	0.0197



IMPORTANT NOTICE

Wuxi PWChip Semi Technology CO., LTD (PW) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any products or services. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

PW assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using PW components.

PW products are not authorized for use in safety-critical applications (such as life support devices or systems) where a failure of the PW product would reasonably be expected to affect the safety or effectiveness of that devices or systems.

The information included herein is believed to be accurate and reliable. However, PW assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.